



BIAS 4 Watt LED Drivers

Universal Input/Output with AOVC™

BPWXL 4-12U-035 (350mA constant current)

BPWXLD 4-12U-035 (350mA, 0-10 dimmable)



Benefits

- Bias Adaptive Output Voltage Control, AOVC™ technology (patent pending) provides the broadest range of applications with the fewest driver SKUs and 75%+ efficiency across all string lengths
- Highly reliable, rugged construction for indoor or outdoor applications
- True 0-10 volt dimming with 1000:1 range, IEC 60929 compliant
- 1% current regulation and no flicker
- Color coded flying leads for simple assembly and installation
- AC line or DC load switching without overshoot on startup

Operating Specifications

(@120VAC / 60 Hz / 25°C unless otherwise specified)

Electrical	
Input Voltage Range	100-308 VAC (50/60Hz)
Output Power (Pmax)	4 W nom (50/60Hz)
String Voltage (Minimum)	3.0 VDC
Efficiency	75% nom.
Temperature Regulation I _o (Peak)	+/- 2%, P _o < P _{max}
Isolation	3000 VAC (meets UL/CSA & EN Product Safety)
Earth Leakage @ 120 VAC	< 10 uA
Short Circuit Protection	Continuous, Pin ≤ 0.7 w @ 120 VAC
Reliability @ 25° C, MIL HDBK-217F	> 500 Khr MTBF
0-10 VDC Dimming	Per IEC 60929, Annex E
Line Regulation, I _o (Peak)	+/- 1%, P _o < P _{max}
AC Input Connections	Line BLK, Neutral WHT
DC Output Connections	Pos(+) RED, Neg (-) BLU
Dimming (0-10 VDC) Connections	Adjust PUR/Com GRY

Environmental	
Operating Temperature	-40 to 85° C
Case Temperature, maximum	90° C
Storage Temperature	-40 to 105° C
Ingress Protection	IP67
Mechanical	
Package Size (L x W x H)	1.9 x 1.74 x 0.94 inches
Lead Length	11", 18AWG 600V class
Safety and Standards	
Safety Compliance	UL: 60950-1, 2nd Ed./CSAC22.2 60950-1-07 2nd Ed. ETL: UL 8750 Class 2/CAN/CSA c22.2 (1)
EMI Emissions	EN 55022, Class B, FCC Part 15, Class B
Standards Compliance	IEC61347-1, IEC61347-2-3

Model Number	Maximum String Voltage	Output Current	Dimming
BPWXL 4-12U-035	12 VDC	350 mA	N/A
BPWXLD 4-12U-035	12 VDC	0 - 350 mA	0 to 10 VDC, Vd



5 Year Limited Warranty - see Bias Power published warranty for specifics



www.biaspower.com

BPWXL 4 Series Data Sheet, Page 1 of 2

Revised 11/02/2013

Specifications subject to change




BIAS 4 Watt LED Drivers

Universal Input/Output with AOVC™

BPWXL 4-12U-035 (350mA constant current)

BPWXLD 4-12U-035 (350mA, 0-10 dimmable)

Non-Dimming (BPWXL)

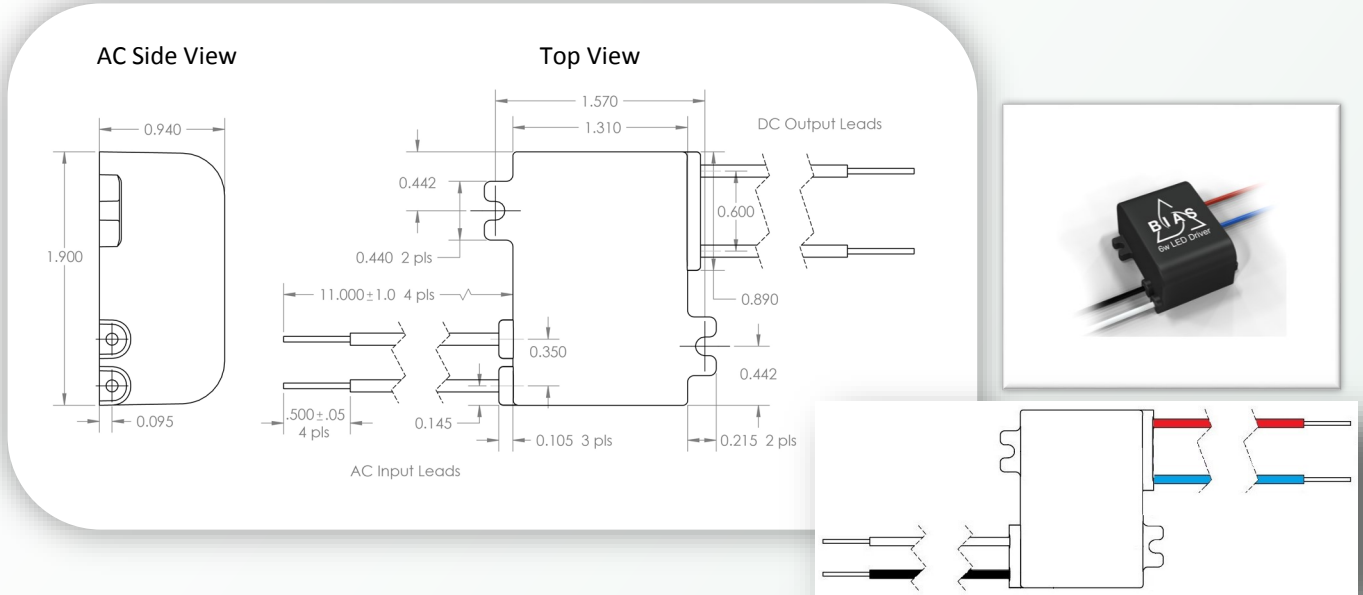

Dimming (BPWXLD)

